# SHELVING WITH SLOPED SHELVES



INDEX	PAGE(S)
Shelving with Sloped Shelves	106
Preconfigured Models	. 107-109
Components	. 110-113

### SHELVING WITH SLOPED SHELVES

Rousseau shelving with sloped shelves provides superior-quality gravity flow storage that integrates perfectly with other products in our Spider® range. This unique product on the market is available in a wide range of dimensions to fulfill your exact requirements.

With an average slope of 15 degrees, sloped shelves are perfect for rear-loading applications (flow rack). These units help to create a "first in, first out" (FIFO) system. Shelving units without rear access are also available for more conventional storage.


Sloped shelves provide optimum visibility for items stored on shelves above the user's eye level. For shelves below this level, the extra angle reduces visibility of the shelf contents. If visibility is more important than flow in your system, we recommend installing lower shelves at right angles (SH20/21).



SRE1F-EE750501 + SRG1F-EE750501

# PRECONFIGURED MODELS



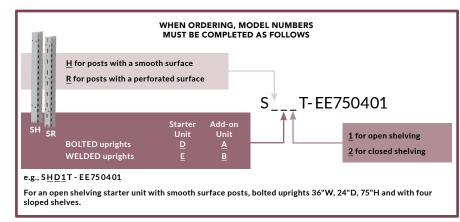

SRE1T-EE750502\*

NOTE: A sloped shelf (SH27) can be replaced with a right-angled BOX shelf (SH20/21), see page 110.

### **OPEN AND CLOSED SHELVING**

#### HERE ARE SOME OF OUR MOST POPULAR PRECONFIGURED MODELS OF SHELVING UNITS

- The preconfigured models in this section include open or closed uprights and sloped shelves
- The shelves have perforations for SH52 dividers and SH57 guides in 1<sup>1</sup>/<sub>2</sub>" increments c/c. Extra perforations have also been added on each side for aligning an SH52 divider or an SH57 guide with the side of the post (this part acts as a side edge and prevents interference between stored items and the post fold)
- SH52 dividers are available for 18"D and 24"D shelving only
- A sloped shelf can be replaced with a right-angled BOX shelf, see page 110
- The closed shelving preconfigured models in this section include back panels and a front base
- The open shelving preconfigured models in this section . include a back brace

Contract of the local division of the	
1	1

**OPEN SHELVING** 





#### **CLOSED SHELVING**



SRE2T-EE750501 Starter unit

DI	MENSIO	NS		NUMBER OF SHELVES	
w	D	н	4	5	6
	18"		ST-EC750401	ST-EC750501	ST-EC750601
	24"	75"	ST-EE750401	ST-EE750501	ST-EE750601
	30"	/5 -	ST-EH750401	ST-EH750501	ST-EH750601
	36"		ST-EJ750401	ST-EJ750501	ST-EJ750601
	18"		ST-EC870401	ST-EC870501	ST-EC870601
36"	24"	87" -	ST-EE870401	ST-EE870501	ST-EE870601
30	30"		ST-EH870401	ST-EH870501	ST-EH870601
	36"		ST-EJ870401	ST-EJ870501	ST-EJ870601
	18"		ST-EC990401	ST-EC990501	ST-EC990601
	24"	99"	ST-EE990401	ST-EE990501	ST-EE990601
	30"	99	ST-EH990401	ST-EH990501	ST-EH990601
	36"		ST-EJ990401	ST-EJ990501	ST-EJ990601
	18"		ST-GC750401	ST-GC750501	ST-GC750601
	24"	75"	ST-GE750401	ST-GE750501	ST-GE750601
	30"	/5	ST-GH750401	ST-GH750501	ST-GH750601
	36"		ST-GJ750401	ST-GJ750501	ST-GJ750601
	18"		ST-GC870401	ST-GC870501	ST-GC870601
42"	24"	87"	ST-GE870401	ST-GE870501	ST-GE870601
42	30"	87	ST-GH870401	ST-GH870501	ST-GH870601
	36"		ST-GJ870401	ST-GJ870501	ST-GJ870601
	18"		ST-GC990401	ST-GC990501	ST-GC990601
	24"	99"	ST-GE990401	ST-GE990501	ST-GE990601
	30"	77	ST-GH990401	ST-GH990501	ST-GH990601
	36"		ST-GJ990401	ST-GJ990501	ST-GJ990601
	18"		ST-HC750401	ST-HC750501	ST-HC750601
	24"	75"	ST-HE750401	ST-HE750501	ST-HE750601
	30"	/5	ST-HH750401	ST-HH750501	ST-HH750601
	36"		ST-HJ750401	ST-HJ750501	ST-HJ750601
	18"		ST-HC870401	ST-HC870501	ST-HC870601
48"	24"	87"	ST-HE870401	ST-HE870501	ST-HE870601
40	30"	07	ST-HH870401	ST-HH870501	ST-HH870601
	36"		ST-HJ870401	ST-HJ870501	ST-HJ870601
	18"		ST-HC990401	ST-HC990501	ST-HC990601
	24"	99"	ST-HE990401	ST-HE990501	ST-HE990601
	30"	- 99" —	ST-HH990401	ST-HH990501	ST-HH990601
	36"		ST-HJ990401	ST-HJ990501	ST-HJ990601

SRB2T-EE750501 Add-on unit

SRB1T-EE750501

Add-on unit

## **PRECONFIGURED MODELS**

### BACK-TO-BACK OPEN AND CLOSED SHELVING

### HERE ARE SOME OF OUR MOST POPULAR PRECONFIGURED MODELS OF SHELVING UNITS

- The preconfigured models in this section include open or closed uprights and sloped shelves
- The shelves have perforations for SH52 dividers and SH57 guides in 1½" increments c/c. Extra perforations have also been added on each side for aligning an SH52 divider or an SH57 guide with the side of the post (this part acts as a side edge and prevents interference between stored items and the post fold)

7

SRB1T-EE751001B

Add-on unit

- SH52 dividers are available for 18"D and 24"D shelving only
- A sloped shelf can be replaced with a right-angled BOX shelf, see page 110
- The closed shelving preconfigured models in this section include back panels and front bases
- The open shelving preconfigured models in this section include a back brace

#### OPEN SHELVING



SRE1T-EE751001B Starter unit

### CLOSED SHELVING




D	IMENSION	٩S		NUMBER OF SHELVES	
w	D*	н	8	10	12
	36"	7.5.1	ST-EC750801B	ST-EC751001B	ST-EC751201B
	48"		ST-EE750801B	ST-EE751001B	ST-EE751201B
	60"	75"	ST-EH750801B	ST-EH751001B	ST-EH751201B
	72"		ST-EJ750801B	ST-EJ751001B	ST-EJ751201B
	36"		ST-EC870801B	ST-EC871001B	ST-EC871201B
36"	48"		ST-EE870801B	ST-EE871001B	ST-EE871201B
30	60"	87"	ST-EH870801B	ST-EH871001B	ST-EH871201B
	72"		ST-EJ870801B	ST-EJ871001B	ST-EJ871201B
	36"		ST-EC990801B	ST-EC991001B	ST-EC991201B
	48"	99"	ST-EE990801B	ST-EE991001B	ST-EE991201B
	60"	77	ST-EH990801B	ST-EH991001B	ST-EH991201B
	72"		ST-EJ990801B	ST-EJ991001B	ST-EJ991201B
	36"		ST-GC750801B	ST-GC751001B	ST-GC751201B
	48"	75"	ST-GE750801B	ST-GE751001B	ST-GE751201B
	60"	/5	ST-GH750801B	ST-GH751001B	ST-GH751201B
	72"		ST-GJ750801B	ST-GJ751001B	ST-GJ751201B
	36"	- 87"	ST-GC870801B	ST-GC871001B	ST-GC871201B
42"	48"		ST-GE870801B	ST-GE871001B	ST-GE871201B
42	60"		ST-GH870801B	ST-GH871001B	ST-GH871201B
	72"		ST-GJ870801B	ST-GJ871001B	ST-GJ871201B
	36"	_	ST-GC990801B	ST-GC991001B	ST-GC991201B
	48"	99"	ST-GE990801B	ST-GE991001B	ST-GE991201B
	60"	,,	ST-GH990801B	ST-GH991001B	ST-GH991201B
	72"		ST-GJ990801B	ST-GJ991001B	ST-GJ991201B
	36"		ST-HC750801B	ST-HC751001B	ST-HC751201B
	48"	75"	ST-HE750801B	ST-HE751001B	ST-HE751201B
	60"	,,,	ST-HH750801B	ST-HH751001B	ST-HH751201B
	72"		ST-HJ750801B	ST-HJ751001B	ST-HJ751201B
	36"		ST-HC870801B	ST-HC871001B	ST-HC871201B
48"	48"	87"	ST-HE870801B	ST-HE871001B	ST-HE871201B
40	60"	0,	ST-HH870801B	ST-HH871001B	ST-HH871201B
	72"		ST-HJ870801B	ST-HJ871001B	ST-HJ871201B
	36"		ST-HC990801B	ST-HC991001B	ST-HC991201B
	48"	99"	ST-HE990801B	ST-HE991001B	ST-HE991201B
	60"	- 99"	ST-HH990801B	ST-HH991001B	ST-HH991201B
	72"		ST-HJ990801B	ST-HJ991001B	ST-HJ991201B

NOTE: \* The depth includes two units. e.g., 36"D = two 18"D units

# PRECONFIGURED MODELS



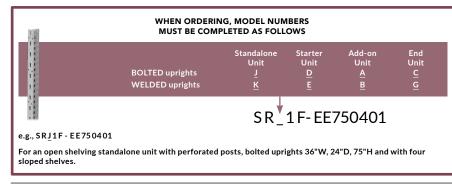

NOTE: A sloped shelf (SH27) can be replaced with a right-angled BOX shelf (SH20/21), see page 110.

### **FIFO OPEN SHELVING**

#### HERE ARE SOME OF OUR MOST POPULAR PRECONFIGURED MODELS OF SHELVING UNITS

- The preconfigured models in this section include open uprights and sloped shelves These preconfigured models include two dividing guides per shelf. The guides can be adjusted in 1<sup>1</sup>/<sub>2</sub>" increments c/c.
- The shelves have perforations for SH52 dividers and SH57 guides in  $1\frac{1}{2}$ " increments c/c. Extra perforations have also been added on each side for aligning an SH52 divider or an SH57 guide with the side of the post (this part acts as a side edge and prevents interference between stored items and the post fold)
- SH52 dividers are available for 18"D and 24"D shelving only
- A sloped shelf can be replaced with a right-angled BOX shelf, see page 110
- These preconfigured models include single or double corner gussets (depending on configuration)

	-
	RK1F-DC750401
-	Standalone Unit



D	IMENSION	١S		NUMBER OF SHELVES	
W	D	н	4	5	6
I	18"	_	SR_1F-EC750401	SR_1F-EC750501	SR_1F-EC750601
	24"	75"	SR_1F-EE750401	SR_1F-EE750501	SR _ 1F-EE750601
	30"	/5	SR_1F-EH750401	SR_1F-EH750501	SR_1F-EH750601
	36"		SR _ 1F-EJ750401	SR_1F-EJ750501	SR _ 1F-EJ750601
	18"		SR_1F-EC870401	SR_1F-EC870501	SR_1F-EC870601
36"	24"	87"	SR _ 1F-EE870401	SR_1F-EE870501	SR_1F-EE870601
30	30"	07	SR_1F-EH870401	SR_1F-EH870501	SR_1F-EH870601
	36"		SR_1F-EJ870401	SR_1F-EJ870501	SR _ 1F-EJ870601
	18"		SR_1F-EC990401	SR_1F-EC990501	SR_1F-EC990601
	24"	99"	SR_1F-EE990401	SR_1F-EE990501	SR_1F-EE990601
	30"	//	SR _ 1F-EH990401	SR_1F-EH990501	SR_1F-EH990601
	36"		SR_1F-EJ990401	SR_1F-EJ990501	SR _ 1F-EJ990601
	18"		SR_1F-GC750401	SR_1F-GC750501	SR_1F-GC750601
	24"	75"	SR_1F-GE750401	SR_1F-GE750501	SR_1F-GE750601
	30"	75	SR_1F-GH750401	SR_1F-GH750501	SR _ 1F-GH750601
	36"		SR_1F-GJ750401	SR_1F-GJ750501	SR_1F-GJ750601
	18"	- 87"	SR_1F-GC870401	SR_1F-GC870501	SR _ 1F-GC870601
42"	24"		SR_1F-GE870401	SR_1F-GE870501	SR_1F-GE870601
12	30"		SR_1F-GH870401	SR_1F-GH870501	SR _ 1F-GH870601
	36"		SR_1F-GJ870401	SR_1F-GJ870501	SR_1F-GJ870601
	18"		SR_1F-GC990401	SR_1F-GC990501	SR_1F-GC990601
	24"	99"	SR_1F-GE990401	SR_1F-GE990501	SR_1F-GE990601
	30"		SR_1F-GH990401	SR_1F-GH990501	SR_1F-GH990601
	36"		SR_1F-GJ990401	SR_1F-GJ990501	SR_1F-GJ990601
	18"		SR_1F-HC750401	SR_1F-HC750501	SR_1F-HC750601
	24"	75"	SR_1F-HE750401	SR_1F-HE750501	SR _ 1F-HE750601
	30"		SR_1F-HH750401	SR_1F-HH750501	SR_1F-HH750601
	36"		SR_1F-HJ750401	SR_1F-HJ750501	SR_1F-HJ750601
	18"		SR_1F-HC870401	SR_1F-HC870501	SR_1F-HC870601
48"	24"	87"	SR_1F-HE870401	SR_1F-HE870501	SR_1F-HE870601
-10	30"		SR_1F-HH870401	SR_1F-HH870501	SR_1F-HH870601
	36"		SR _ 1F-HJ870401	SR_1F-HJ870501	SR _ 1F-HJ870601
	18"		SR_1F-HC990401	SR_1F-HC990501	SR_1F-HC990601
	24"	99"	SR_1F-HE990401	SR_1F-HE990501	SR_1F-HE990601
	30"	,,	SR_1F-HH990401	SR_1F-HH990501	SR_1F-HH990601
	36"		SR_1F-HJ990401	SR_1F-HJ990501	SR _ 1F-HJ990601

### SHELVES AND SHELF ACCESSORIES

#### SLOPED SHELF

- For gravity flow storage ("first in, first out" — FIFO)
- Approx. 15° angle slope
- Includes a heavy-duty front edge to keep stored items in place. Front edge height: 1%"
- 20ga steel shelves (painted steel)
- Shelf is placed on galvanized steel side supports (included)
- Includes perforations for SH52 dividers and SH57 dividing guides in 1<sup>1</sup>/<sub>2</sub>" increments c/c
- SH52 dividers are available for 18"D and 24"D shelving only
- Extra perforations have been added to the sides to optimize alignment of the divider or guide with the post and to prevent stored items from falling
- Height can be adjusted in 1" increments, except if SR35 or SR36 corner gussets are used (in which case, can be adjusted in 2" increments)
- Sloped shelves and non-sloped SH20 and SH21 BOX shelves can be combined in the same unit

- Sloped shelf load capacity: 450lb.
- Compatible with:
- SH99 base for mobile shelving
- SH41, SH43, SH91 and SH93 doors with frame\*
- SH85 flipper door directly underneath an SH27 shelf\*
- Drawers directly underneath an SH27 shelf\*
- SH28 base
- SH81 and SH82 label holders
- SH37, SH38, SH66, SH68, SH69 and SR79 panels

PRODUCT NO.	W×D	PRODUCT NO.	W×D
SH27-3018	30"×18"	SH27-4218	42"×18"
SH27-3024	30"×24"	SH27-4224	42"×24"
SH27-3030	30"×30"	SH27-4230	42"×30"
SH27-3036	30"×36"	SH27-4236	42"×36"
SH27-3618	36"×18"	SH27-4818	48"×18"
SH27-3624	36"×24"	SH27-4824	48"×24"
SH27-3630	36"×30"	SH27-4830	48"×30"
SH27-3636	36"×36"	SH27-4836	48"×36"

NOTES: Not compatible with the following products: SH50 divider, SH56 dividing rod, SH65 and SH67 panels for plastic bins, SH35 corner gussets. \*Not compatible with SR35 and SR36 corner gussets.

One SH2A reinforcements increase the BOX shelf's rigidity (but do not increase

the shelf's load capacity).

#### BOX SHELF



SH60

20ga steel. Thickness: 1¼"
Includes four sturdy and compact SH60 clips

welded front and back edges

• BOX-type shelf with roll-formed and

- Includes perforations spaced 3" apart c/c for installing SH52 dividers
- SH52 dividers are available for 18"D and 24"D shelving only
- To order: Complete the product number with the width required: 30", 36", 42" or 48"
- SH20: Reinforcements are available for these shelves. For load capacities, see page 110
- SH21: To see load capacities and shelf reinforcements available, refer to the following table

PRODUCT NO.	DEPTH
SH2018	18"
SH2024	24"
SH2130*	30"
SH2136*	36"

NOTE: \* Double bend on the sides.

SH21 SHELF LOAD CAPACITY

SH20/SH21

Visual distortion is reduced if an SH26 reinforcement and two SH23 reinforcements are used on the shelf.

	×		
SHELVES	CAPACITY WITHOUT REINFORCEMENT	CAPACITY WITH SH23 REINFORCEMENT	CAPACITY WITH SH23 & SH26 REINFORCEMENT
SH21-3030	575	925	-
SH21-3036	425	825	-
SH21-3630	600	800	-
SH21-3636	425	800	-
SH21-4230	625	-	850
SH21-4236	525	-	775
SH21-4830	500	-	800
SH21-4836	500	-	800

# **OMPONENTS**

SH57

#### **GUIDES**



- Guides for sloped shelves (version 01) can be used to guide items all the way down the shelf
  - Width can be adjusted in 1<sup>1</sup>/<sub>2</sub>" increments
  - The front of the guide slots into the bend at the front of the shelf
  - The guide is held at the back by a plastic end piece that screws into the shelf holes
  - 18"D and 24"D guides use aluminum rods, while 30"D and 36"D guides use stainless steel rods

(R)

• Tubular T shape provides up to seven

on each side for easy adjustment

Includes perforations spaced 1" apart c/c

SR10/SH10

- Dividing guides for BOX shelves (version 02) can be used to separate items
  - -Width can be adjusted in 3" increments
  - The guide is held at the front and back by a plastic end piece that screws into the shelf holes
- 18"D and 24"D guides use aluminum rods, while 30"D and 36"D guides use stainless steel rods
- Heavy-duty black plastic end pieces

WELDED OPEN UPRIGHT

DIMENSIONS	PRODUC	CT NO.
DEPTH	SLOPED SHELF	BOX SHELF
18"	SH57-1801	SH57-1802
24"	SH57-2401	SH57-2402
30"	SH57-3001	SH57-3002
36"	SH57-3601	SH57-3602

### STRUCTURAL COMPONENTS

fixing zones

of shelves



front surface units. Compa corner gusse - SH10 shelvir	ng post with sm	i-racking and SR36 ooth
compatible w	for a neater fin vith SR35 and S	
corner gusse	ts	
SR UNIVERSAL POST	SH SHELVING POST	HEIGHT
SR10-039	SH10-039	39"
SR10-051	SH10-051	51"
SR10-075	SH10-075	75"
SR10-087	SH10-087	87"
SR10-099	SH10-099	99"
SR10-111	SH10-111	111"
SR10-123	SH10-123	123"

NOTES: The maximum height for FIFO use (with SR35 and SR36 corner gussets) is 99". The unique design of the Spider® post is a trademark of Rousseau Metal Inc.



#### Upright with factory-welded side braces Enables faster assembly To order: Complete the product number with the depth required: 18", 24", 30" or 36" • Options: SR11 open upright with perforated front surface for adding mini-racking units. Compatible with SR35 and SR36 corner gussets SH11 open upright with smooth front surface for a neater finish. Not compatible with SR35 and SR36 corner gussets SR

51	511	
UNIVERSAL POST	SHELVING POST	HEIGHT
SR110752	SH110752	75"
SR110872	SH110872	87"
SR110992	SH110992	99"

NOTE: The maximum height for FIFO use (with SR35/SR36 corner gussets) is 99".

#### WELDED CLOSED UPRIGHT



SR11 / SH11

- · Upright with full-height factorywelded panel
- Enables faster assembly
- To order: Complete the product number
- with the depth required: 18", 24", 30" or 36" • Options:
- SR12 closed upright with perforated front surface for adding mini-racking units. Compatible with SR35 and SR36 corner gussets
- SH12 closed upright with smooth front surface for a neater finish. Not compatible with SR35 and SR36 corner gussets

SR UNIVERSAL POST	SH SHELVING POST	HEIGHT
SR12075	SH12075	75"
SR12087	SH12087	87"
SR12099	SH12099	99"

NOTE: The maximum height for FIFO use (with SR35 and SR36 corner gussets) is 99".

# COMPONENTS

S	
Ш >	
Ι	
S S	
<b>D</b>	
L L	
Ē	
3	
U	
Ζ	
2	
뿌	
S	

# SHELF FRONT OR FRONT BASE

- Same component used for both applications
- Quick and easy hook-on installation
- To order: Complete the product number with the width required: 30", 36", 42" or 48"

PRODUCT NO.	HEIGHT
SH2802	2"
SH2805	5"

NOTE: The 2"H front base is always included with closed shelving preconfigured models (except the ones with sliding panels).

• Panel combinations:

or 48" product no.

SH31-\_\_39

SH31-\_\_51

75"H posts (39"H + 39"H)

- 99"H posts (51"H + 51"H)

87"H posts (39"H + 51"H)

111"H posts (39"H + 39"H + 39"H)

123"H posts (39"H + 39"H + 51"H)
To order: Complete the product number with the width required: 30", 36", 42"

HEIGHT

39" 51" SH28 SIDE PANEL

- -
  - Panel combinations:
  - 75"H posts (39"H + 39"H)
  - 87"H posts (39"H + 51"H)
  - 99"H posts (51"H + 51"H)
  - 111"H posts (39"H + 39"H + 39"H)
  - 123"H posts (39"H + 39"H + 51"H)
  - To order: Complete the product number with the depth required: 18", 24", 30" or 36"

PRODUCT NO.	HEIGHT
SH3039	39"
SH3051	51"

#### BACK PANEL

SH31


- SH33
- X-shaped factory-assembled brace
- Easy to install
- Recommendations:
- For 99"H uprights and shorter: one brace
- For uprights higher than 99": two braces

PRODUCT NO.	WIDTH	
SH33-30	30"	
SH33-36	36"	
SH33-42	42"	
SH33-48	48"	

NOTES: Please refer to technical guide S58 or contact your customer service representative for exact placement of the brace.

Do not use with FIFO shelving. Replace with SR35 and SR36 corner gusset kits.

#### SIDE BRACES



- Sold in pairs
- Enables uprights to be attached in a "ladder" for easier assembly
- Recommendations:
- 99"H uprights or shorter: one pair of side braces
- For uprights higher than 99"H: please refer to technical guide S58 or contact your customer service representative

PRODUCT NO.	DEPTH
SH34-18	18"
SH34-24	24"
SH34-30	30"
SH34-36	36"

#### SH34 SINGLE CORNER GUSSET KIT

 Replaces a back sway brace to provide full access to the front and rear of the shelving

SR35

- For use with an end-of-aisle post or a common post with shelves side by side and offset by at least 4" in height
- Does not allow two shelves side by side at the same height
- Installs at the front and back of the post Compatible with SH20, SH21 and SH27 shelves
- For use with SR uprights and posts only
- Not compatible with doors with frame, drawers, roll-out shelves and flipper doors

PRODUCT NO.		
SR35-02	1 pair	
SR35-04	2 pairs	

NOTES: A minimum of three kits of two SR35 or SR36 gussets per post is required to provide proper lateral bracing. Not to be used for shelving over 99"H, multi-level shelving or double shelf reinforcements (SHC2).



SH30

# **OMPONENTS**

#### DOUBLE CORNER GUSSET KIT

- Replaces sway brace to provide full access
- to the front and rear of the shelving For use with a common post with shelves side by side at the same height
- Installs at the front and back of the post
- Compatible with SH20, SH21 and SH27 shelves
- For use with SR uprights and posts only
- Not compatible with doors with frame, drawers, roll-out shelves and flipper doors

PRODUCT NO.	
SR36-02	1 pair

NOTES: A minimum of three kits of two SR35 or SR36 gussets per common post is required to provide proper lateral bracing. Not to be used for shelving over 99"H, multi-level shelving or double shelf reinforcements (SHC2).

#### SR36 STRUCTURAL BACK UTILITY PANEL

- Utility panel for the backs of shelving
- Forms an integral part of the ٠ shelving structure
- Holes spaced 1" apart c/c
- Load capacity: maximum 250lb. per panel •
- Compatible with WM9F, WM9G, WM9H, WM9J and WM9L light-duty hooks, and WM9A and WM9B heavy-duty hooks
- Compatible with WM9C rails, and WM9D, WM9M, WM9N, WM9P and WM9Q holders
- Panel combinations:
  - 75"H posts (39"H+39"H)
- \_ 87"H posts (39"H+51"H)
- 99"H posts (51"H+51"H)
- To order: Complete the product number with the width required: 30", 36", 42" or 48"

PRODUCT NO.	HEIGHT
SH7939	39"
SH7951	51"

NOTE: Used without SH31 back panels.

### INSTALLATION ACCESSORIES

#### FLOOR ANCHOR PLATE

- Sold individually
- Attaches to the post for anchoring shelving sections to the ground. Distributes the load over a larger surface and protects the floor
- 12ga galvanized steel

PRODUCT NO. SH45

#### SHIM PLATE

- Sold individually
- Levels shelving units on uneven surfaces Slides under SH45 floor anchor plates 12ga or 16ga galvanized steel

0	0 0	
PRODUCT	NO.	THICKNESS
SH46-12		12 gauge (0,100")

#### FLOOR ANCHORING HARDWARE

Used for anchoring shelving to the floor;

16 gauge (0,060")

Includes 4 cement screws.

PRODUCT NO. SH47-04

SH46-16



#### **SR47**

SR49

- Anchors shelving to the wall
- Adjusts from 3" to 4"
  - Wall anchoring hardware not included (holes are 5/16" dia.)

PRODUCT NO. SR47-0304

#### LEVELING GLIDES KIT

- Sold in pairs
- Adjusts the height of Spider<sup>®</sup> Shelving • units from 1<sup>1</sup>/<sub>4</sub>" to 2<sup>1</sup>/<sub>8</sub>" on uneven surfaces
- Load capacity: maximum 750lb. per glide
- Restrictions:
  - Only compatible with 99"H shelving or shorter
  - Only compatible with SR uprights and posts
  - Not compatible with RF32 and RF36 modular drawers, RF41 and RF45 rollout shelves and SH28 bases

PRODUCT NO.	
SR49-01	

SH79

SH46

SH47





## WALL SPACER









